

Suspension with diffuser made of crystal (35mm thick) very accurately shaped, working as an optical lens. Metal parts are made of die-cast aluminium. The decentralizing kit is always included. 1-10V dimming or DALI dimming available.

Finishing

Standard

- Brushed nickel
cod. 380LD4400

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 1800 lm
- Emitted flux: 1380 lm
- Efficacy: 66 lm/W
- CCT: 3000K
- CRI index: 97
- Lifetime: >55000h L80 @ 25°C

Electrical Facts



- Source power: 18 W
- Power absorption: 21 W
- Stand-by absorption: < 2 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: internal AC-DC converter provided
- Dimmability: 1-10V, DALI dimmable
- Energy class: A++

Technical data

- Environment: indoor
- Placement: pendant
- Net weight: 4,1 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: I
- Protection class: IP20

Packaging
cardboard box
43 x 20 x 30 (cm)
0,026 m³

Gross weight
4,9 Kg

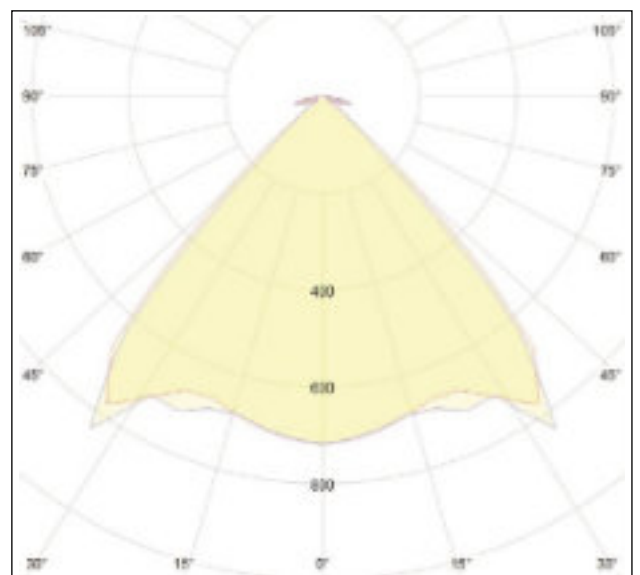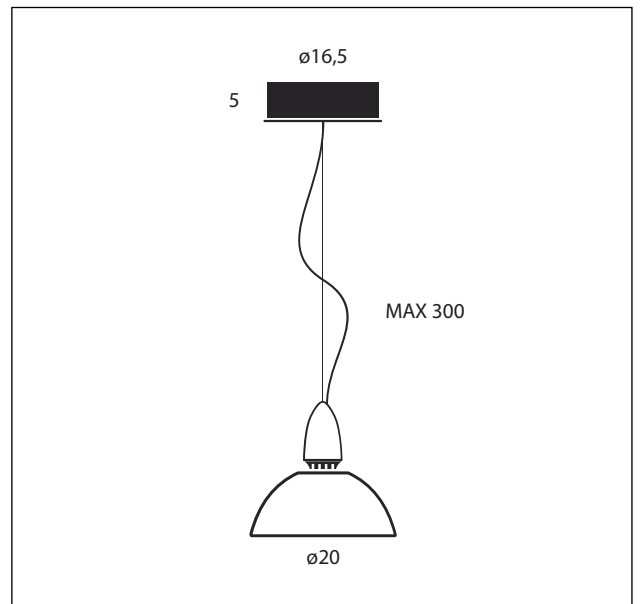



Suspension with diffuser made of crystal (35mm thick) very accurately shaped, working as an optical lens. Metal parts are made of die-cast aluminium. The decentralizing kit is always included. 1-10V dimming or DALI dimming available.

Finishing

Standard

- Brushed nickel
cod. 38OLD44K27

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 1720 lm
- Emitted flux: 1315 lm
- Efficacy: 63 lm/W
- CCT: 2700K
- CRI index: 97
- Lifetime: >55000h L80 @ 25°C

Electrical Facts



- Source power: 18 W
- Power absorption: 21 W
- Stand-by absorption: < 2 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: internal AC-DC converter provided
- Dimmability: 1-10V, DALI dimmable
- Energy class: A++

Technical data

- Environment: indoor
- Placement: pendant
- Net weight: 4,1 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: I
- Protection class: IP20

Packaging
cardboard box
43 x 20 x 30 (cm)
0,026 m³

Gross weight
4,9 Kg

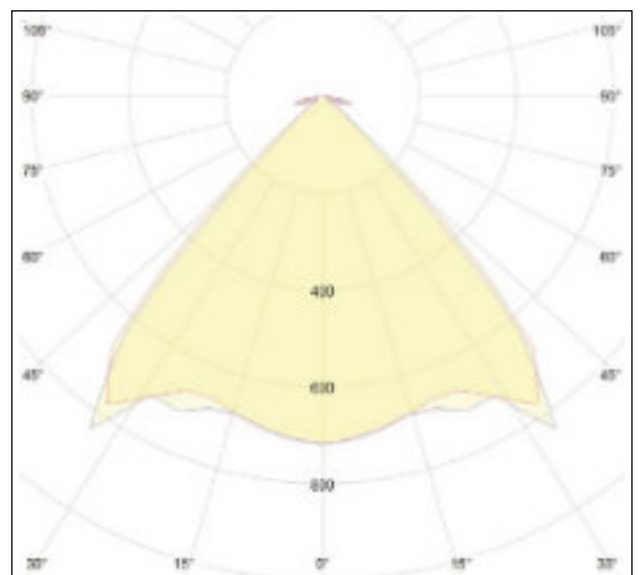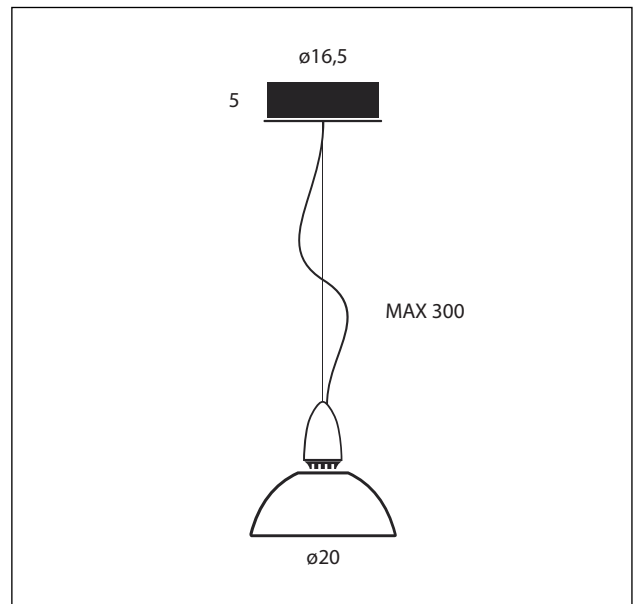

Galileo Mini

design Emanuele Ricci, 2002

release 2019, December



Suspension with diffuser made of crystal (35mm thick) very accurately shaped, working as an optical lens. Metal parts are made of die-cast aluminium. The decentralizing kit is always included. 1-10V dimming or DALI dimming available.

Finishing

Standard

- Brushed nickel
cod. 383LS4400

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 780 lm
- Emitted flux: 605 lm
- Efficacy: 67,2 lm/W
- CCT: 3000K
- CRI index: >80
- Lifetime: >50000h L70 @ 25°C

Electrical Facts



- Source power: 8 W
- Power absorption: 9 W
- Stand-by absorption: < 2 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: internal AC-DC converter provided
- Dimmability: not dimmable
- Energy class: A++

Technical data

- Environment: indoor
- Placement: pendant
- Net weight: 1,3 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: I
- Protection class: IP20

Packaging
cardboard box
30 x 18 x 15 (cm)
0,008 m³

Gross weight
1,6 Kg

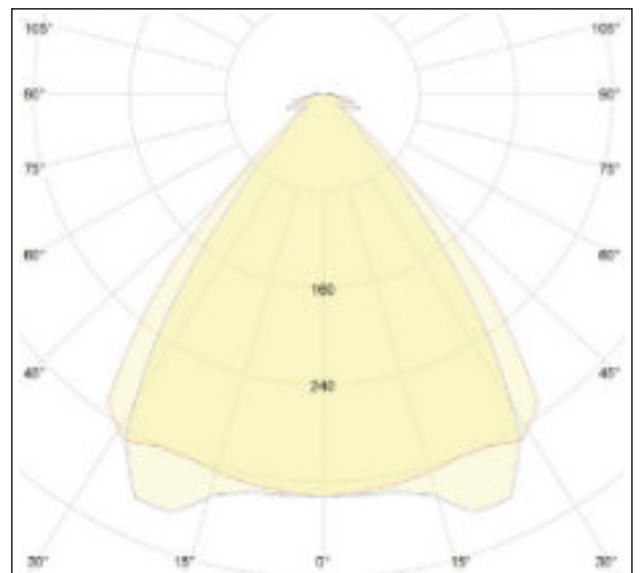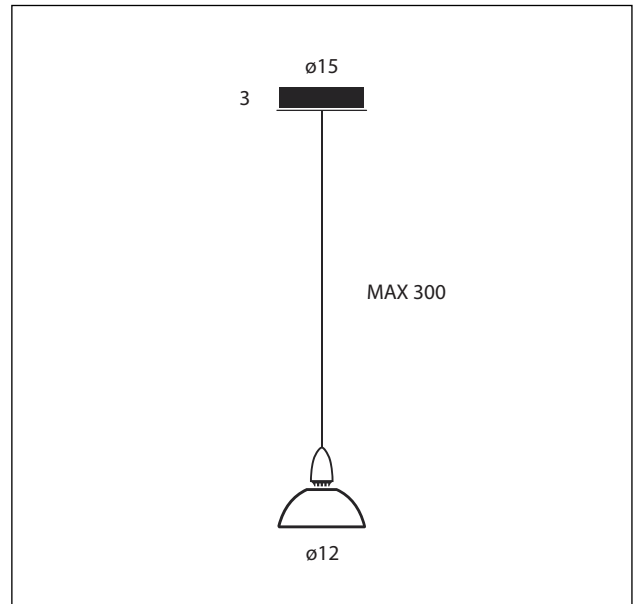

Galileo Mini

design Emanuele Ricci, 2002

release 2019, December



Suspension with diffuser made of crystal (35mm thick) very accurately shaped, working as an optical lens. Metal parts are made of die-cast aluminium. The decentralizing kit is always included. 1-10V dimming or DALI dimming available.

Finishing

Standard

- Brushed nickel
cod. 383LD4400

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 780 lm
- Emitted flux: 605 lm
- Efficacy: 67,2 lm/W
- CCT: 3000K
- CRI index: >80
- Lifetime: >50000h L70 @ 25°C

Electrical Facts

- Source power: 8 W
- Power absorption: 9 W
- Stand-by absorption: < 2 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: internal AC-DC converter provided
- Dimmability: 1-10V, DALI dimmable
- Energy class: A++

Technical data

- Environment: indoor
- Placement: pendant
- Net weight: 1,3 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: I
- Protection class: IP20

Packaging
cardboard box
30 x 18 x 15 (cm)
0,008 m³

Gross weight
1,6 Kg

