

Flo Grommet F20



Foster+Partners, 2012



Desk lamp in varnish coated aluminium and steel for diffused directional light, to be fixed on a table surface. The head rotates 300° to direct the 6W-LED light and the structure swivells 300°. 2-step push switch positioned on the head.

FINISHINGS

 Black Soft Touch 3000K - cod. 96201ST00 2700K - cod. 96201STK27	 Brushed Nickel 3000K - cod. 96244000 2700K - cod. 96244K27
 Matt White 3000K - cod. 962020P00 2700K - cod. 962020PK27	 Metallic Bronze 3000K - cod. 96229MT00 2700K - cod. 96229MTK27
 Matt Red 3000K - cod. 962030P00 2700K - cod. 962030PK27	 Gun Metal 3000K - cod. 96232000 2700K - cod. 96232K27
 Matt Yellow 3000K - cod. 962050P00 2700K - cod. 962050PK27	

ALL RAL COATING AND GALVANIC FINISHES AVAILABLE UPON REQUEST

LIGHT EMISSION

Light source power: 5,06W
Power absorption: 7,5W
Light Emission: Diffuse
Light Direction: Directional
Light Source: Discrete LED
Source Flux 3000K: 395lm@550mA
Emitted Flux 3000K: 314 lm



Efficacy 3000K: 42lm/W
Source Flux 2700K: 380lm@550mA
Emitted Flux 2700K: 302lm
Efficacy 2700K: 40 lm/W
CCT: 2700/3000K
CRI: 90
Lifetime: >55000h

ELECTRICAL FACTS

Stand-by absorption: <0.5
Mains Voltage: 100/240VAC
Master output: 24VDC; max 0.83A
Ta max: 40°C

PACKAGING DATA

Box dimensions: 69x47x8 cm
Volume: 0,0246 m³
Gross weight: 1,62 kg

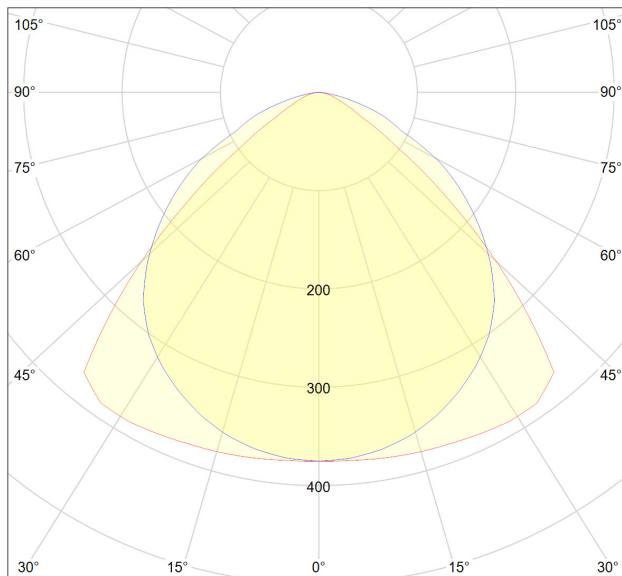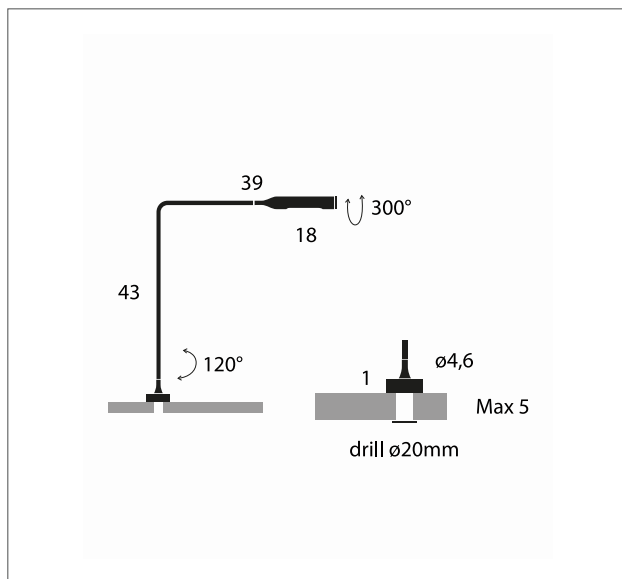

Flo Grommet F46



LUMINA

Foster+Partners, 2012



Desk lamp in varnish coated aluminium and steel for diffused directional light, with embedded connection to be fixed on a table surface. The head rotates 300° to direct the 6W-LED light and the structure swivells 300°. 2-step push switch positioned on the head.

FINISHINGS

 Black Soft Touch 3000K - cod. 96001ST00 2700K - cod. 96K271STK27	 Brushed Nickel 3000K - cod. 96044000 2700K - cod. 96044K27
 Matt White 3000K - cod. 960020P00 2700K - cod. 96K2720PK27	 Metallic Bronze 3000K - cod. 96029MT00 2700K - cod. 96029MTK27
 Matt Red 3000K - cod. 960030P00 2700K - cod. 96K2730PK27	 Gun Metal 3000K - cod. 96032000 2700K - cod. 96032K27
 Matt Yellow 3000K - cod. 960050P00 2700K - cod. 96K2750PK27	

ALL RAL COATING AND GALVANIC FINISHES AVAILABLE UPON REQUEST

LIGHT EMISSION

Light source power: 5,06W
Power absorption: 7,5W
Light Emission: Diffuse
Light Direction: Directional
Light Source: Discrete LED
Source Flux 3000K: 395lm@550mA
Emitted Flux 3000K: 314 lm

Efficacy 3000K: 42lm/W
Source Flux 2700K: 380lm@550mA
Emitted Flux 2700K: 302lm
Efficacy 2700K: 40 lm/W
CCT: 2700/3000K
CRI: 90
Lifetime: >55000h

ELECTRICAL FACTS

Stand-by absorption: <0.5
Mains Voltage: 100/240VAC
Master output: 24VDC; max 0.83A
Ta max: 40°C

PACKAGING DATA

Box dimensions: 69x47x8 cm
Volume: 0,0246 m³
Gross weight: 1,62 kg

