




Wall lamp for indirect light emission made from a single solid block of aluminium, realized with CNC machinery. The light emitted upwards offers a strong and large lighting beam on wall and ceiling. Power supply included into the lamp, set for push dimming protocol.

FINISHINGS

| | |
|---|---|
| <p>— Matt White 2700K cod.ONDD02OPK27220 3000K cod.ONDD02OPK30220</p> | <p>— Anodised Black 2700K cod.ONDD01XOK27220 3000K cod.ONDD01XOK30220</p> |
| <p>— Anodised Brass 2700K cod.ONDD50XOK27220 3000K cod.ONDD50XOK30220</p> | <p>— Anodised Aluminium 2700K cod.ONDD08XOK27220 3000K cod.ONDD08XOK30220</p> |
| <p>— Brushed Nickel 2700K cod.ONDD44K27220 3000K cod.ONDD44K30220</p> | |

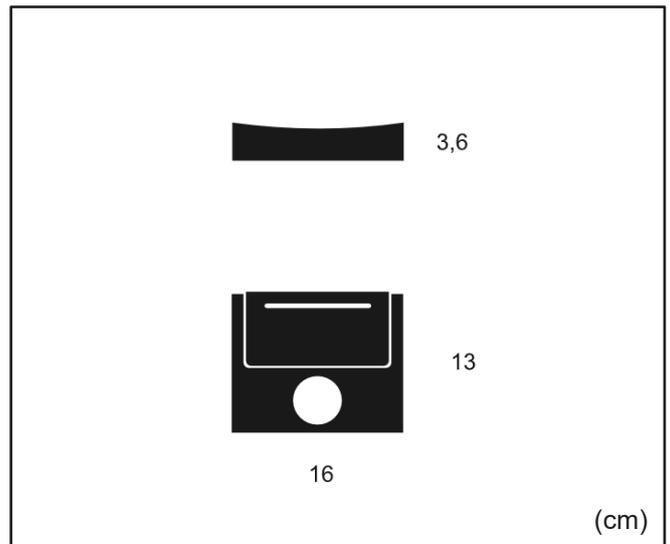

LIGHT EMISSION


| | | | |
|---------------------|--------------|---------------------|--------------|
| Light source power: | 18W | Source Flux 2700K: | 4496lm@500mA |
| Power absorption: | 20W | Emitted Flux 2700K: | 1927lm |
| Light Emission: | Diffuse | Efficacy 2700K: | 96lm/W |
| Light Direction: | Indirect | Source Flux 3000K: | 4588lm@500mA |
| Light Source: | Discrete LED | Emitted Flux 3000K: | 1966lm |
| CCT: | 2700/3000K | Efficacy 3000K: | 98lm/W |
| CRI: | >90 | | |
| Lifetime: | >55000h | | |

ELECTRICAL FACTS

| | |
|----------------------|------------|
| Stand-by absorption: | <0.6W |
| Mains Voltage: | 220/240VAC |
| Master output: | 500mA |
| Ta max: | 40°C |

PACKAGING DATA

| | |
|-----------------|---------------------|
| Box dimensions: | 24x19x9,5cm |
| Volume: | 0,004m ³ |
| Gross weight: | 1,65Kg |

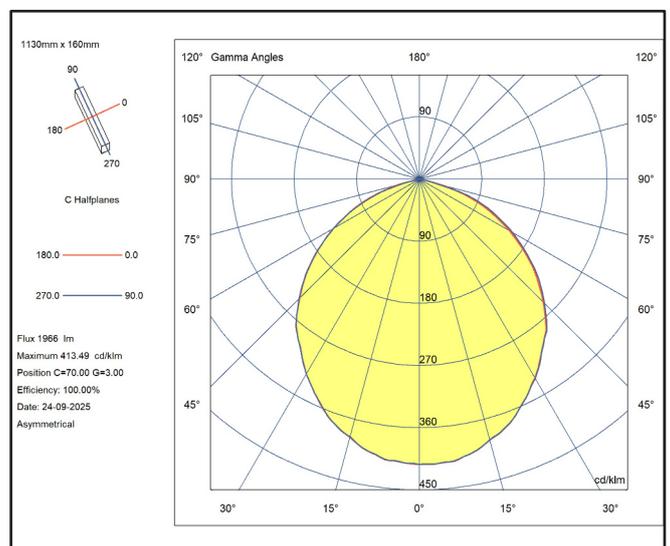

Ondu TF


Marco Acerbis, 2025



Wall lamp for indirect light emission made from a single solid block of aluminium, realized with CNC machinery. The light emitted upwards offers a strong and large lighting beam on wall and ceiling. Power supply included into the lamp, set for Triac dimming.

FINISHINGS

| | |
|--|--|
| — Matt White 2700K cod.ONDTF02OPK27220 3000K cod.ONDTF02OPK30220 | — Anodised Black 2700K cod.ONDTF01XOK27220 3000K cod.ONDTF01XOK30220 |
| — Anodised Brass 2700K cod.ONDTF50XOK27220 3000K cod.ONDTF50XOK30220 | — Anodised Aluminium 2700K cod.ONDTF08XOK27220 3000K cod.ONDTF08XOK30220 |
| — Brushed Nickel 2700K cod.ONDTF44K27220 3000K cod.ONDTF44K30220 | |

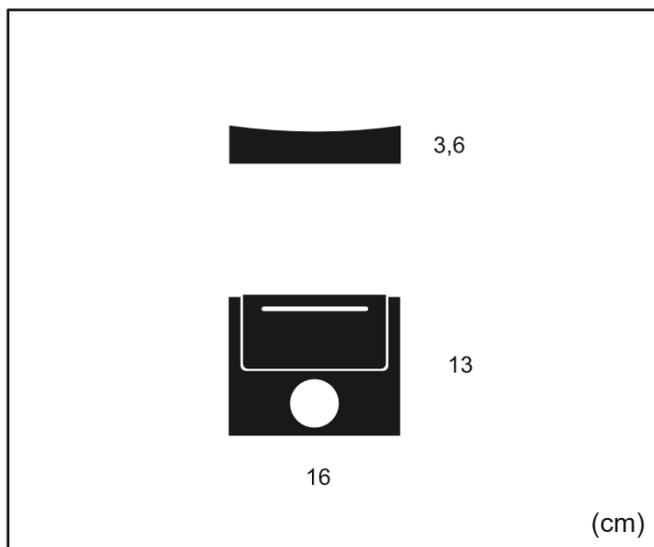

LIGHT EMISSION


| | | | |
|---------------------|--------------|---------------------|--------------|
| Light source power: | 18W | Source Flux 2700K: | 4496lm@500mA |
| Power absorption: | 20W | Emitted Flux 2700K: | 1927lm |
| Light Emission: | Diffuse | Efficacy 2700K: | 96lm/W |
| Light Direction: | Indirect | Source Flux 3000K: | 4588lm@500mA |
| Light Source: | Discrete LED | Emitted Flux 3000K: | 1966lm |
| CCT: | 2700/3000K | Efficacy 3000K: | 98lm/W |
| CRI: | >90 | | |
| Lifetime: | >55000h | | |

ELECTRICAL FACTS

| | |
|----------------------|------------|
| Stand-by absorption: | <0.6W |
| Mains Voltage: | 220/240VAC |
| Master output: | 500mA |
| Ta max: | 40°C |

PACKAGING DATA

| | |
|-----------------|---------------------|
| Box dimensions: | 24x19x9,5cm |
| Volume: | 0,004m ³ |
| Gross weight: | 1,65Kg |

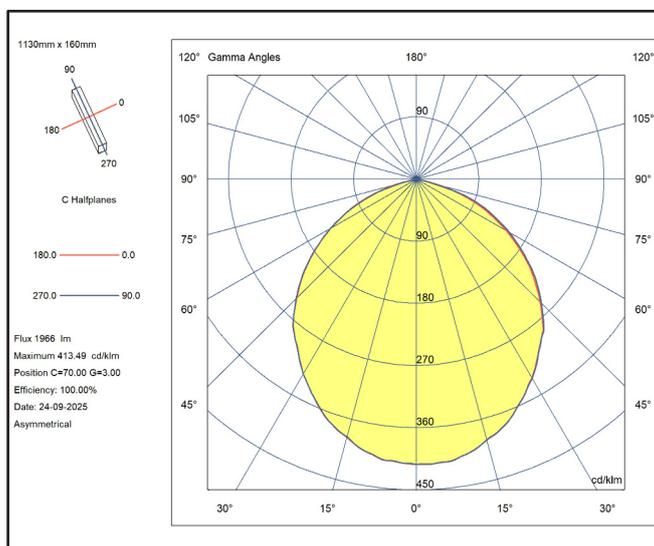

Ondu Modular

Marco Acerbis, 2025




Modular wall lamp for indirect light emission made from a single solid block of aluminium, realized with CNC machinery. The light emitted upwards offers a strong and large lighting beam on wall and ceiling.

Power supply not included and to be remotely installed.

FINISHINGS

| | |
|--|--|
| — Matt White 2700K cod.ONDM02OPK27 3000K cod.ONDM02OPK30 | — Anodised Black 2700K cod.ONDM01XOK27 3000K cod.ONDM01XOK30 |
| — Anodised Brass 2700K cod.ONDM50XOK27 3000K cod.ONDM50XOK30 | — Anodised Aluminium 2700K cod.ONDM08XOK27 3000K cod.ONDM08XOK30 |
| — Brushed Nickel 2700K cod.ONDM44K27 3000K cod.ONDM44K30 | |

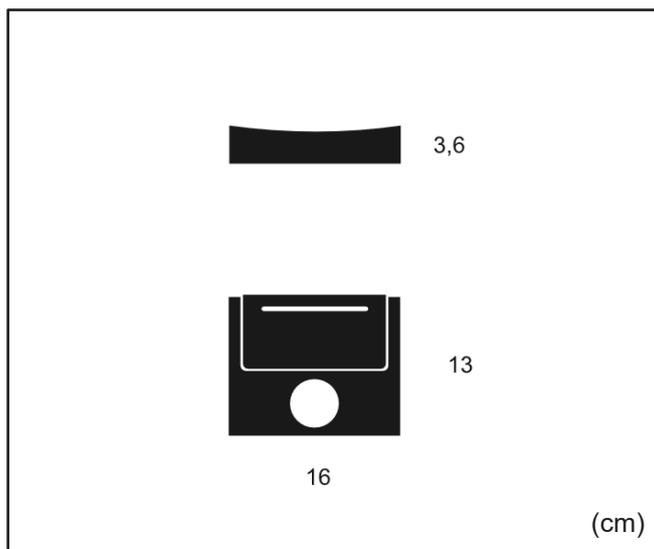

LIGHT EMISSION

| | | | |
|---------------------|--------------|---------------------|--------------|
| Light source power: | 18W | Source Flux 2700K: | 4496lm@500mA |
| Power absorption: | 20W | Emitted Flux 2700K: | 1927lm |
| Light Emission: | Diffuse | Efficacy 2700K: | 96lm/W |
| Light Direction: | Indirect | Source Flux 3000K: | 4588lm@500mA |
| Light Source: | Discrete LED | Emitted Flux 3000K: | 1966lm |
| CCT: | 2700/3000K | Efficacy 3000K: | 98lm/W |
| CRI: | >90 | | |
| Lifetime: | >55000h | | |

ELECTRICAL FACTS

| | |
|----------------------|-------|
| Stand-by absorption: | N/A |
| Mains Voltage: | N/A |
| Master output: | 500mA |
| Ta max: | 40°C |

PACKAGING DATA

| | |
|-----------------|---------------------|
| Box dimensions: | 24x19x9,5cm |
| Volume: | 0,004m ³ |
| Gross weight: | 1,5Kg |

