

Daphne Parete 20

Tommaso Cimini, 1984



Last release - 2026, May



Wall lamp in aluminium and steel with swivelling 20cm arm and 360-degree rotating head for diffused directional light. Lighting source controlled by ON-OFF switch. Wall mount houses the electronic power supply.

FINISHINGS

Black Soft Touch
2700K cod.06L01STK27
3000K cod.06L01ST00

Matt White
2700K cod.06L02OPK27
3000K cod.06L02OP00



Matt Yellow
2700K cod.06L05OPK27
3000K cod.06L05OP00

Brushed Nickel
2700K cod.06L44K27
3000K cod.06L4400

Black Classic
2700K cod.06L01K27
3000K cod.06L0100

Matt Red
2700K cod.06L03OPK27
3000K cod.06L03OP00

Metallic Bronze
2700K cod.06L29MTK27
3000K cod.06L29MT00

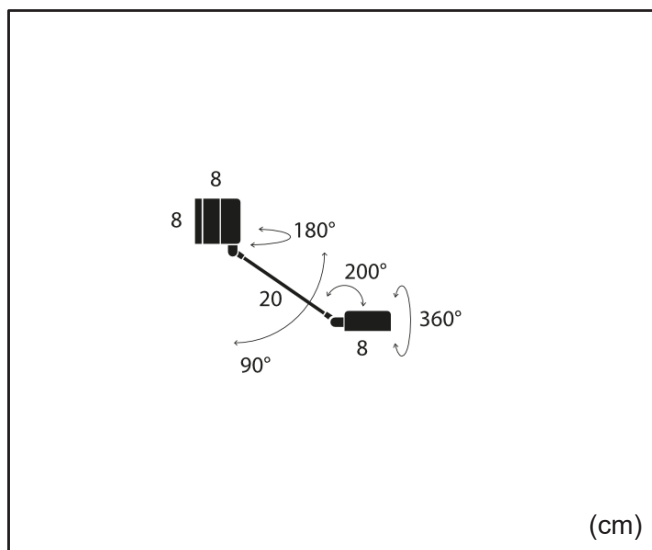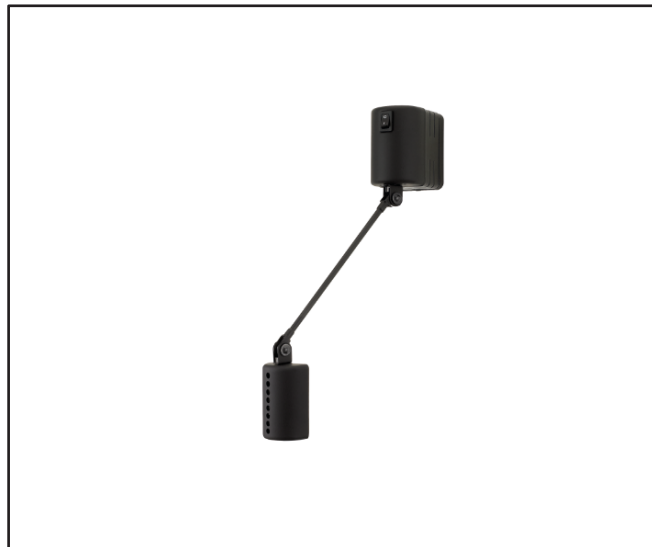

LIGHT EMISSION

Light source power: 5W
Power absorption: 7W
Light Emission: Diffuse
Light Direction: Directional
Light Source: Discrete LED
CCT: 2700/3000K
CRI: 97
Lifetime: >55000h

Source Flux 2700K: 490lm@160mA
Emitted Flux 2700K: 410lm
Efficacy 2700K: 75lm/W


Source Flux 3000K: 500lm@160mA
Emitted Flux 3000K: 426lm
Efficacy 3000K: 77lm/W

ELECTRICAL FACTS

Stand-by absorption: <0.5W
Mains Voltage: 100/240VAC
Master output: 160mA
Ta max: 40°C

PACKAGING DATA

Box dimensions: 44x17x11cm
Volume: 0,008m³
Gross weight: 0,7Kg

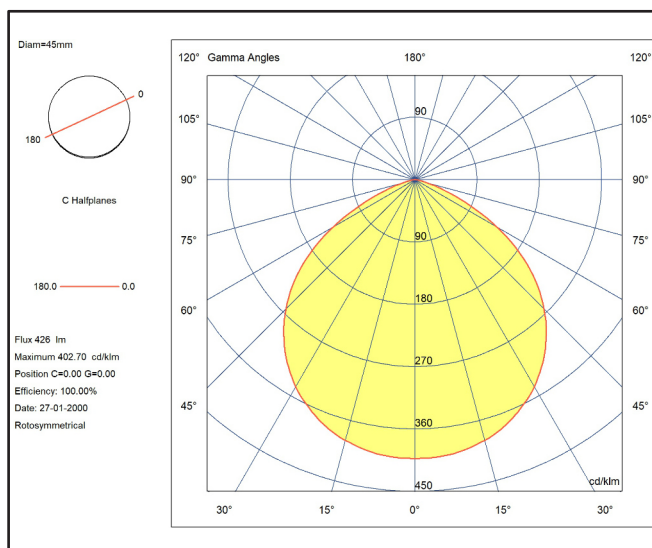

Daphne Parete 35

Tommaso Cimini, 1984

LUMINA

Last release - 2026, May



Wall lamp in aluminium and steel with 1 swivelling 35cm arm and 360-degree rotating head for diffused directional light. Lighting source controlled by ON-OFF switch. Wall mount houses the electronic power supply.

FINISHINGS

Black Soft Touch
2700K cod.05L01STK27
3000K cod.05L01ST00

Matt White
2700K cod.05L02OPK27
3000K cod.05L02OP00


Matt Yellow
2700K cod.05L05OPK27
3000K cod.05L05OP00

Brushed Nickel
2700K cod.05L44K27
3000K cod.05L4400

Black Classic
2700K cod.05L01K27
3000K cod.05L0100

Matt Red
2700K cod.05L03OPK27
3000K cod.05L03OP00

Metallic Bronze
2700K cod.05L29MTK27
3000K cod.05L29MT00

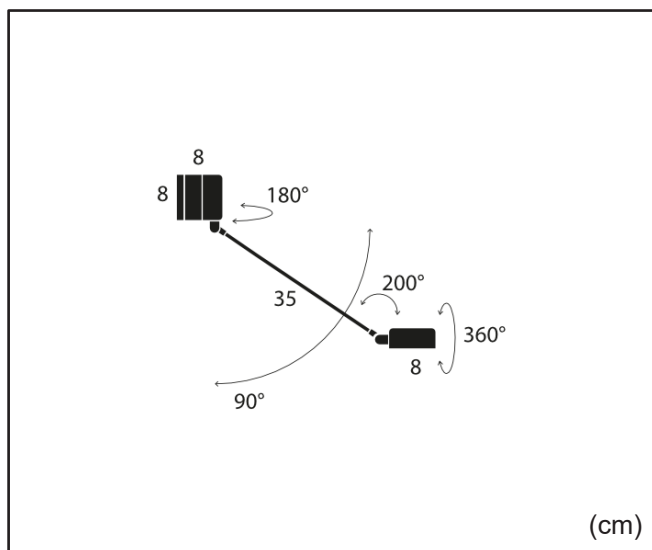

LIGHT EMISSION

Light source power: 5W
Power absorption: 7W
Light Emission: Diffuse
Light Direction: Directional
Light Source: Discrete LED
CCT: 2700/3000K
CRI: 97
Lifetime: >55000h

Source Flux 2700K: 490lm@160mA
Emitted Flux 2700K: 410lm
Efficacy 2700K: 75lm/W

Source Flux 3000K: 500lm@160mA
Emitted Flux 3000K: 426lm
Efficacy 3000K: 77lm/W

ELECTRICAL FACTS

Stand-by absorption: <0.5W
Mains Voltage: 100/240VAC
Master output: 160mA
Ta max: 40°C

PACKAGING DATA

Box dimensions: 44x17x11cm
Volume: 0,008m³
Gross weight: 0,7Kg

