

Dot 600 Dali

Foster+Partners, 2015



Last release - 2026, May




Indirect lighting suspension lamp. Lighting body in aluminium housing the integrated customized LED and the light optic system for diffused light. Aluminium structure and steel matt-painted reflector. Ceiling rose included with DALI dimming option. The decentralization kit is included.

FINISHINGS

Anodised Black
2700K cod.130D01XOK27220
3000K cod.130D01XO220

Anodised Brass
2700K cod.130D50XOK27220
3000K cod.130D50XO220

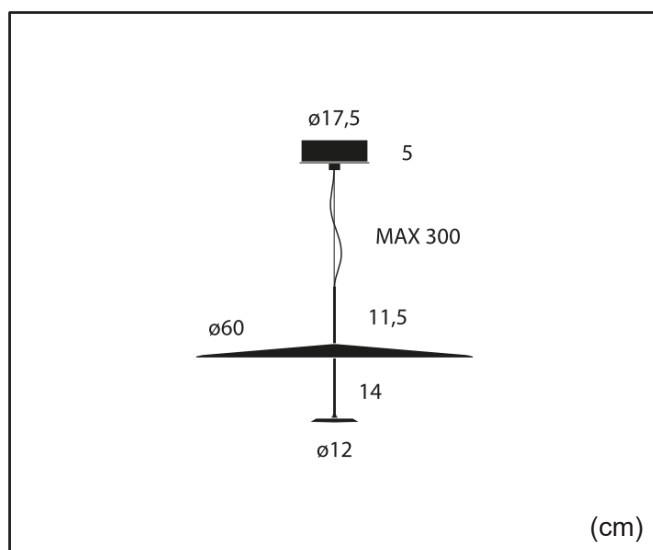

LIGHT EMISSION

Light source power: 25,2W
Power absorption: 27,4W
Light Emission: Diffuse
Light Direction: Indirect Downlight
Light Source: Custom LED Board
CCT: 2700/3000K
CRI: >90
Lifetime: >55000h

Source Flux 2700K: 2400lm@1050mA
Emitted Flux 2700K: 1000lm
Efficacy 2700K: 37lm/W


Source Flux 3000K: 2568lm@1050mA
Emitted Flux 3000K: 1040lm
Efficacy 3000K: 38lm/W

ELECTRICAL FACTS

Stand-by absorption: <0.5W
Mains Voltage: 100/240VAC
Master output: 1050mA
Ta max: 40°C

PACKAGING DATA

Box dimensions: 70x70x24cm
Volume: 0,17m³
Gross weight: 10Kg

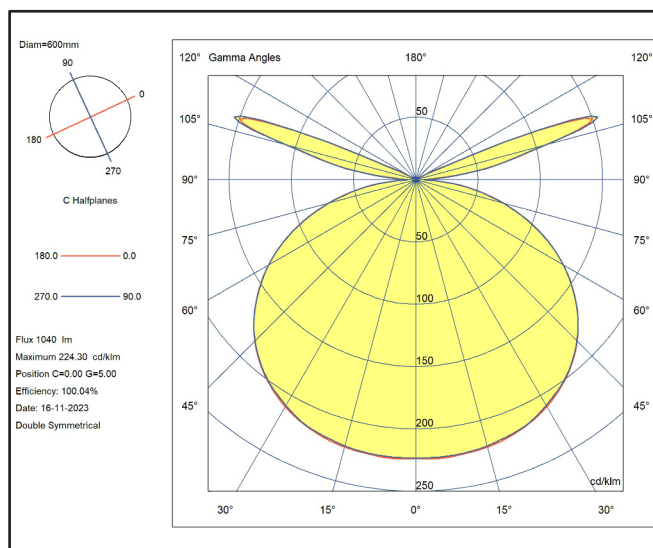

Dot 600 On-Off (1-10V)

Foster+Partners, 2015



Last release - 2026, May




Indirect lighting suspension lamp. Lighting body in aluminium housing the integrated customized LED and the light optic system for diffused light. Aluminium structure and steel matt-painted reflector. Ceiling rose included with Push, 1-10V dimming options. The decentralization kit is included.

Note: ETL version - driver not included.

FINISHINGS

 Anodised Black	 Anodised Brass
2700K cod.130S01XOK27220	2700K cod.130S50XOK27220
3000K cod.130S01XO220	3000K cod.130S50XO220

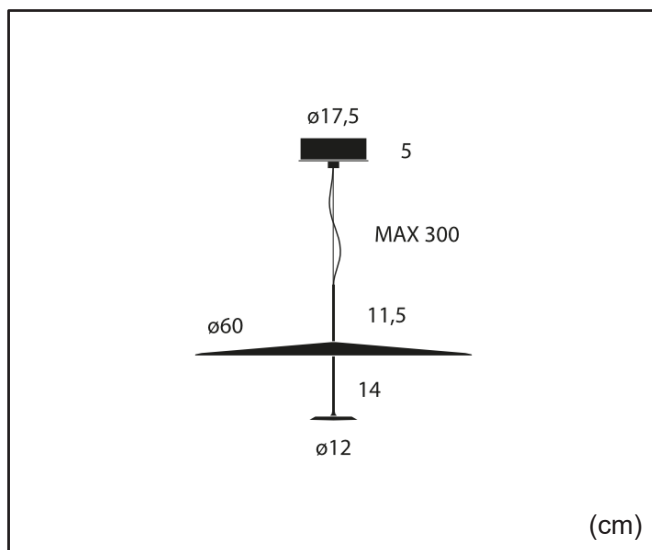


LIGHT EMISSION

Light source power:	21,6W	Source Flux 2700K:	2260lm@900mA
Power absorption:	23,2W	Emitted Flux 2700K:	860lm
Light Emission:	Diffuse	Efficacy 2700K:	37lm/W
Light Direction:	Indirect Downlight	Source Flux 3000K:	2350lm@900mA
Light Source:	Custom LED Board	Emitted Flux 3000K:	893lm
CCT:	2700/3000K	Efficacy 3000K:	39lm/W
CRI:	>90		
Lifetime:	>55000h		

ELECTRICAL FACTS

Stand-by absorption:	<0.5W	Box dimensions:	70x70x24cm
Mains Voltage:	100/240VAC	Volume:	0,17m ³
Master output:	900mA	Gross weight:	10Kg
Ta max:	40°C		

PACKAGING DATA

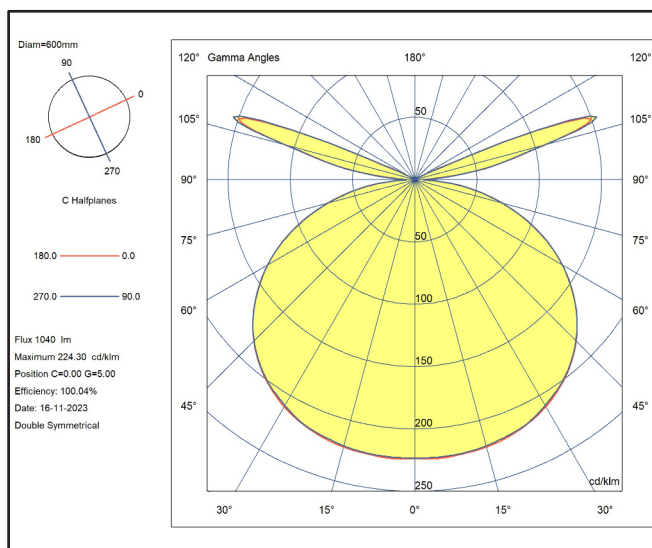

Dot 600 TF

Foster+Partners, 2015

LUMINA

Last release - 2026, May




Indirect lighting suspension lamp. Lighting body in aluminium housing the integrated customized LED and the light optic system for diffused light. Aluminium structure and steel matt-painted reflector. Ceiling rose included with Triac dimming option. The decentralization kit is included.

Note: ETL version - driver not included.

FINISHINGS

 Anodised Black	 Anodised Brass
2700K cod.130TF01XOK27220	2700K cod.130TF50XOK27220
3000K cod.130TF01XO220	3000K cod.130TF50XO220

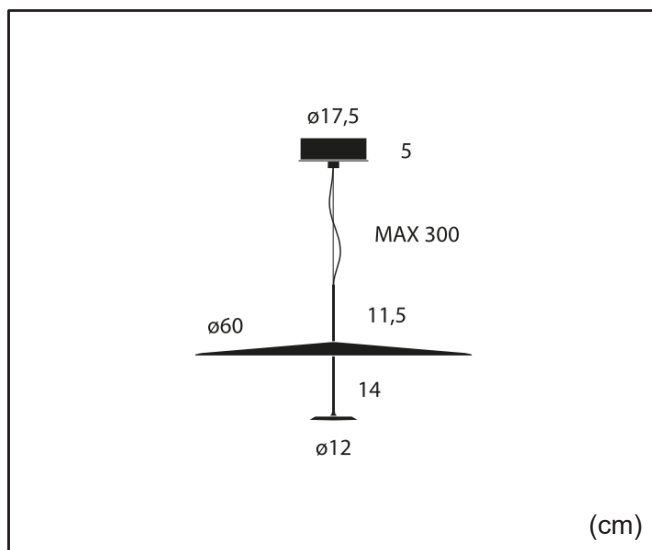


LIGHT EMISSION

Light source power:	25,2W	Source Flux 2700K:	2400lm@1050mA
Power absorption:	27,4W	Emitted Flux 2700K:	1000lm
Light Emission:	Diffuse	Efficacy 2700K:	37lm/W
Light Direction:	Indirect Downlight	Source Flux 3000K:	2568lm@1050mA
Light Source:	Custom LED Board	Emitted Flux 3000K:	1040lm
CCT:	2700/3000K	Efficacy 3000K:	38lm/W
CRI:	>90		
Lifetime:	>55000h		

ELECTRICAL FACTS

Stand-by absorption:	<0.5W	Box dimensions:	70x70x24cm
Mains Voltage:	220/240VAC	Volume:	0,17m ³
Master output:	1050mA	Gross weight:	10Kg
Ta max:	40°C		

PACKAGING DATA

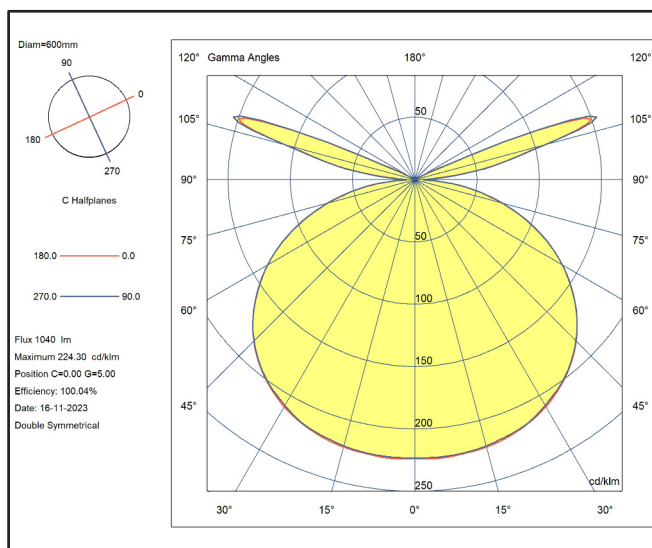

Dot 800 TF

Foster+Partners, 2015

LUMINA

Last release - 2026, May




Indirect lighting suspension lamp. Lighting body in aluminium housing the integrated customized LED and the light optic system for diffused light. Aluminium structure and steel matt-painted reflector. Ceiling rose included with Triac dimming option. The decentralization kit is included.

Note: ETL version - driver not included.

FINISHINGS

 Anodised Black	 Anodised Brass
2700K cod.131TF01XOK27220	2700K cod.131TF50XOK27220
3000K cod.131TF01XO220	3000K cod.131TF50XO220

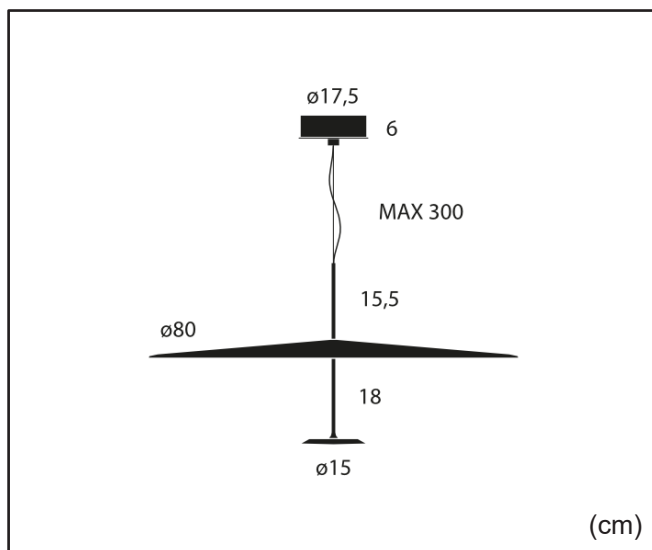

LIGHT EMISSION


Light source power:	33,6W	Source Flux 2700K:	3201lm@1400mA
Power absorption:	37,6W	Emitted Flux 2700K:	1690lm
Light Emission:	Diffuse	Efficacy 2700K:	45lm/W
Light Direction:	Indirect Downlight	Source Flux 3000K:	3425lm@1400mA
Light Source:	Custom LED Board	Emitted Flux 3000K:	1780lm
CCT:	2700/3000K	Efficacy 3000K:	47lm/W
CRI:	>90		
Lifetime:	>55000h		

ELECTRICAL FACTS

Stand-by absorption:	<0.5W
Mains Voltage:	220/240VAC
Master output:	1400mA
Ta max:	40°C

PACKAGING DATA

Box dimensions:	90x90x28cm
Volume:	0,3m ³
Gross weight:	18Kg

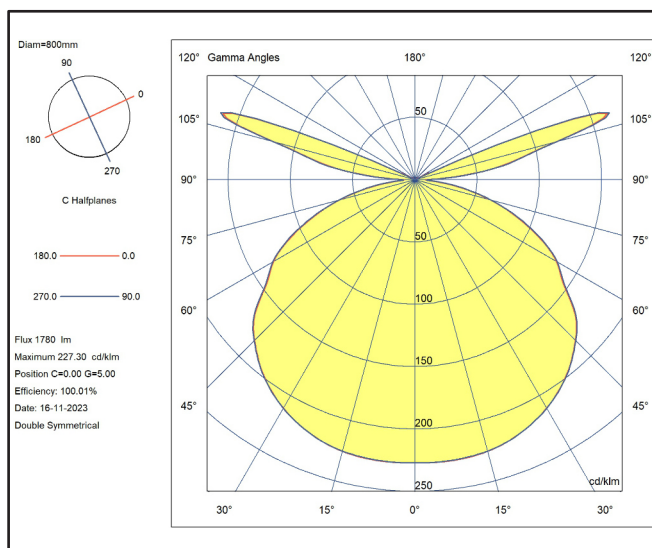

Dot 800

Foster+Partners, 2015

LUMINA

Last release - 2026, May




Indirect lighting suspension lamp. Lighting body in aluminium housing the integrated customized LED and the light optic system for diffused light. Aluminium structure and steel matt-painted reflector. Ceiling rose included with Push, 1-10V and DALI dimming options. The decentralization kit is included.

Note: ETL version - driver not included.

FINISHINGS

 Anodised Black	 Anodised Brass
2700K cod.131D01XOK27220	2700K cod.131D50XOK27220
3000K cod.131D01XO220	3000K cod.131D50XO220

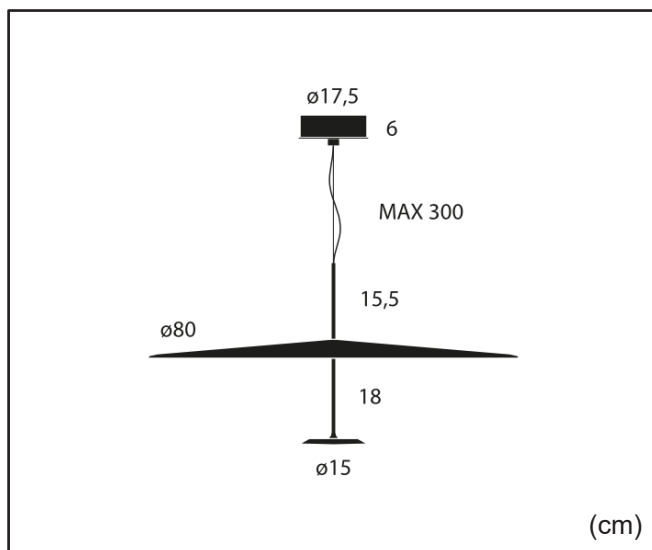

LIGHT EMISSION


Light source power:	33,6W	Source Flux 2700K:	3201lm@1400mA
Power absorption:	37,6W	Emitted Flux 2700K:	1690lm
Light Emission:	Diffuse	Efficacy 2700K:	45m/W
Light Direction:	Indirect Downlight	Source Flux 3000K:	3425lm@1400mA
Light Source:	Custom LED Board	Emitted Flux 3000K:	1780lm
CCT:	2700/3000K	Efficacy 3000K:	47lm/W
CRI:	>90		
Lifetime:	>55000h		

ELECTRICAL FACTS

Stand-by absorption:	<0.5W
Mains Voltage:	100/240VAC
Master output:	1400mA
Ta max:	40°C

PACKAGING DATA

Box dimensions:	90x90x28cm
Volume:	0,3m ³
Gross weight:	18Kg

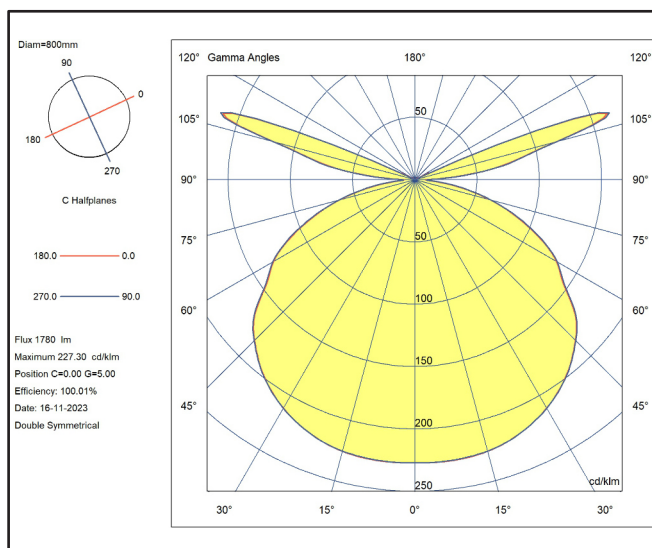

Dot 1100 TF

Foster+Partners, 2015



Last release - 2026, May




Indirect lighting suspension lamp. Lighting body in aluminium housing the integrated customized LED and the light optic system for diffused light. Aluminium structure and steel matt-painted reflector. Ceiling rose included with Triac dimming option. The decentralization kit is included.

Note: ETL version - driver not included.

FINISHINGS

 Anodised Black	 Anodised Brass
2700K cod.132TF01XOK27220	2700K cod.132TF50XOK27220
3000K cod.132TF01XO220	3000K cod.132TF50XO220

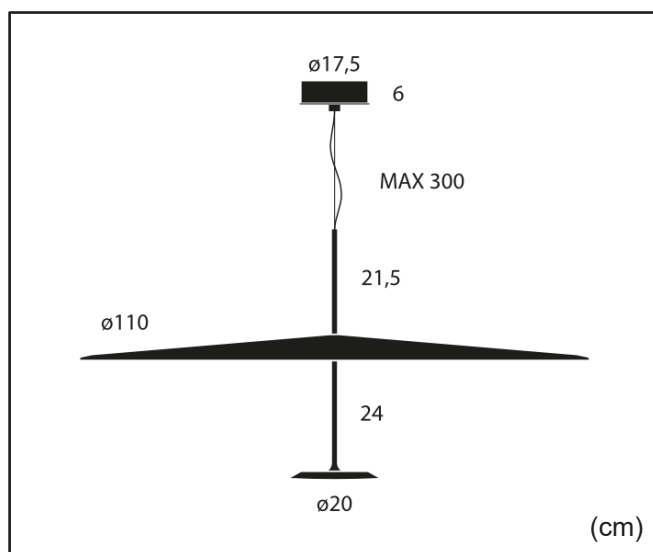


LIGHT EMISSION

Light source power:	50,4W	Source Flux 2700K:	4800lm@2100mA
Power absorption:	56,4W	Emitted Flux 2700K:	2139lm
Light Emission:	Diffuse	Efficacy 2700K:	38lm/W
Light Direction:	Indirect Downlight	Source Flux 3000K:	5136lm@2100mA
Light Source:	Custom LED Board	Emitted Flux 3000K:	2216lm
CCT:	2700/3000K	Efficacy 3000K:	39lm/W
CRI:	>90		
Lifetime:	>55000h		

ELECTRICAL FACTS

Stand-by absorption:	<0.5W	Box dimensions:	118x118x35cm
Mains Voltage:	220/240VAC	Volume:	0,56m ³
Master output:	2100mA	Gross weight:	25Kg
Ta max:	40°C		

PACKAGING DATA

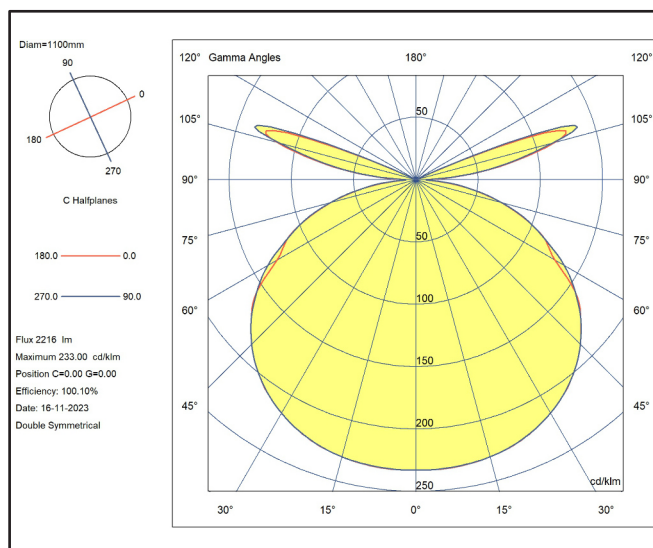

Dot 1100

Foster+Partners, 2015

LUMINA

Last release - 2026, May




Indirect lighting suspension lamp. Lighting body in aluminium housing the integrated customized LED and the light optic system for diffused light. Aluminium structure and steel matt-painted reflector. Ceiling rose included with Push, 1-10V and DALI dimming options. The decentralization kit is included.

Note: ETL version - driver not included.

FINISHINGS

 Anodised Black	 Anodised Brass
2700K cod.132D01XOK27220	2700K cod.132D50XOK27220
3000K cod.132D01XO220	3000K cod.132D50XO220

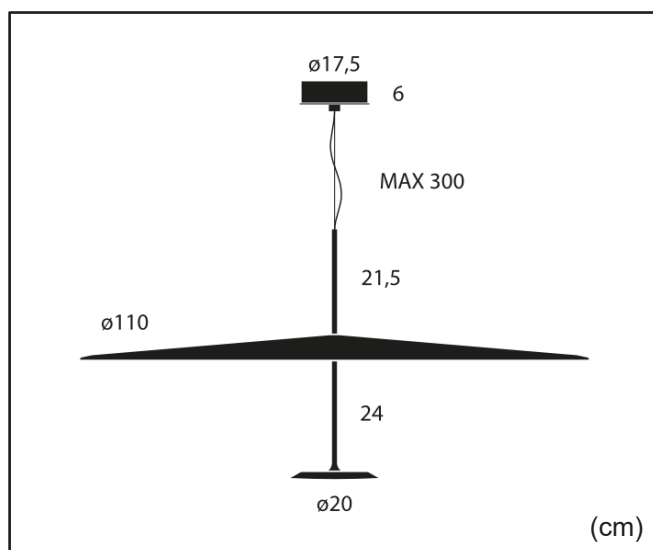

LIGHT EMISSION

Light source power:	50,4W	Source Flux 2700K:	4800lm@2100mA
Power absorption:	56,4W	Emitted Flux 2700K:	2139lm
Light Emission:	Diffuse	Efficacy 2700K:	38lm/W
Light Direction:	Indirect Downlight	Source Flux 3000K:	5136lm@2100mA
Light Source:	Custom LED Board	Emitted Flux 3000K:	2216lm
CCT:	2700/3000K	Efficacy 3000K:	39lm/W
CRI:	>90		
Lifetime:	>55000h		

ELECTRICAL FACTS

Stand-by absorption:	<0.5W	Box dimensions:	118x118x35cm
Mains Voltage:	100/240VAC	Volume:	0,56m ³
Master output:	2100mA	Gross weight:	25Kg
Ta max:	40°C		

PACKAGING DATA

