

# Elle

Tommaso Cimini, 1984

# LUMINA

Last release - 2026, May



Floor lamp for direct and indirect diffuse lighting with two pivotable arms. The head can rotate 180° and is provided with an anti-glare screen grid. Equipped with a foot on-off and dimmer switch.

## FINISHINGS

Black Soft Touch

2700K cod.60L01STK27220

3000K cod.60L01ST220

Matt White

2700K cod.60L02OPK27220

3000K cod.60L02OP220

Metallic Bronze


2700K cod.60L29MTK27220

3000K cod.60L29MT220

Brushed Nickel

2700K cod.60L44K27220

3000K cod.60L44220

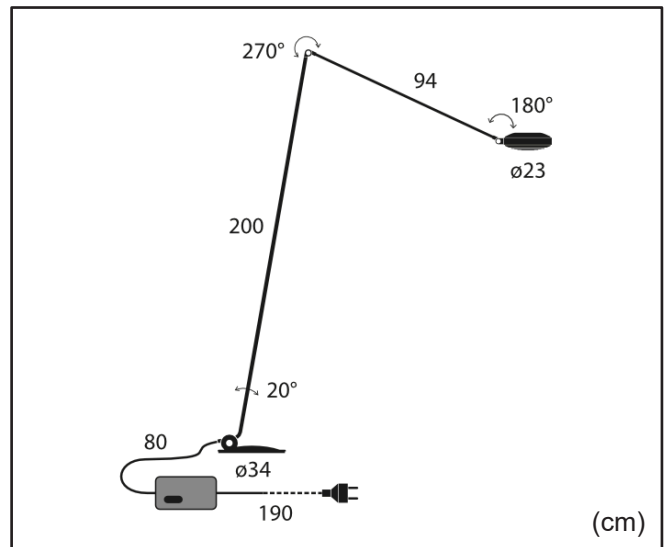


## LIGHT EMISSION

Light source power:	40,8W	Source Flux 2700K:	2744lm@700mA
Power absorption:	48W	Emitted Flux 2700K:	2280lm
Light Emission:	Diffuse	Efficacy 2700K:	47lm/W
Light Direction:	Direct/Indirect	Source Flux 3000K:	2936lm@700mA
Light Source:	Discrete LED	Emitted Flux 3000K:	2346lm
CCT:	2700/3000K	Efficacy 3000K:	49lm/W
CRI:	97		
Lifetime:	>55000h		

## ELECTRICAL FACTS

Stand-by absorption:	<0.5W	Box dimensions:	211x33x13cm
Mains Voltage:	220/240VAC	Volume:	0,145m <sup>3</sup>
Master output:	500/700mA	Gross weight:	18,2Kg
Ta max:	40°C	Second box:	41,5x41,5x10,5cm - 0,017m <sup>3</sup> /13Kg

## PACKAGING DATA

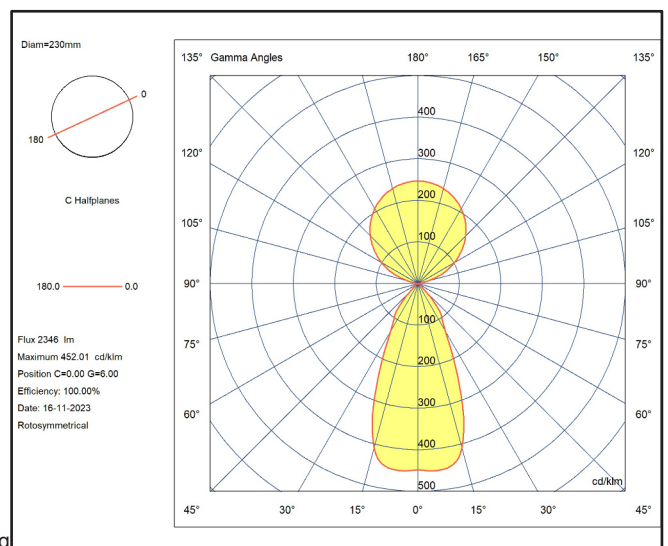

# Elle 1

Tommaso Cimini, 1984

LUMINA

Last release - 2026, May



Floor lamp for direct and indirect diffuse lighting with single pivotable arm. The head can rotate 180° and is provided with an anti-glare screen grid. Equipped with a foot on-off and dimmer switch.

## FINISHINGS

Black Soft Touch

2700K cod.61L01STK27220

3000K cod.61L01ST220

Matt White

2700K cod.61L02OPK27220

3000K cod.61L02OP220

Metallic Bronze


2700K cod.61L29MTK27220

3000K cod.61L29MT220

Brushed Nickel

2700K cod.61L44K27220

3000K cod.61L44220

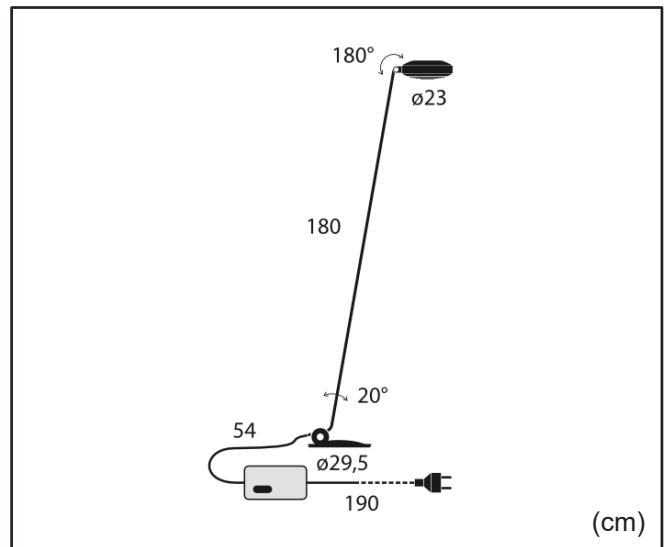

## LIGHT EMISSION

Light source power:	40,8W	Source Flux 2700K:	2744lm@700mA
Power absorption:	48W	Emitted Flux 2700K:	2280lm
Light Emission:	Diffuse	Efficacy 2700K:	47lm/W
Light Direction:	Direct/Indirect	Source Flux 3000K:	2936lm@700mA
Light Source:	Discrete LED	Emitted Flux 3000K:	2346lm
CCT:	2700/3000K	Efficacy 3000K:	49lm/W
CRI:	97		
Lifetime:	>55000h		

## ELECTRICAL FACTS

Stand-by absorption:	<0.5W	Box dimensions:	211x33x13cm
Mains Voltage:	220/240VAC	Volume:	0,127m <sup>3</sup>
Master output:	500/700mA	Gross weight:	9Kg
Ta max:	40°C		

## PACKAGING DATA

