

Eva

Foster+Partners, 2015

LUMINA

Last release - 2026, May

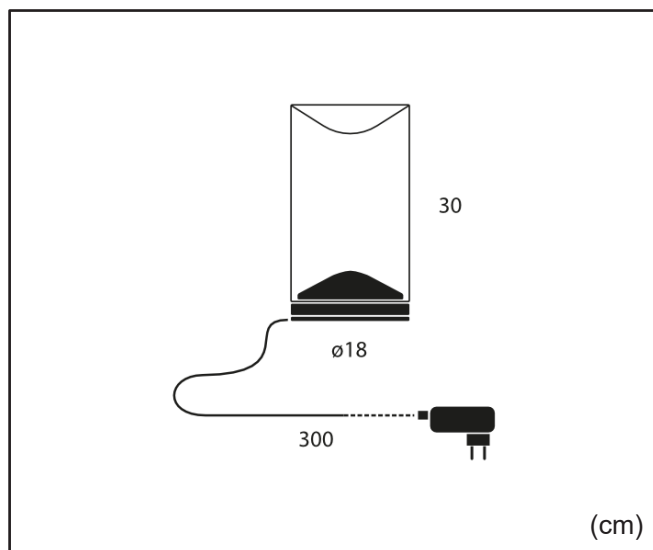


Table lamp for indirect and diffused lighting. The LED source is housed in the base. The light intensity is adjustable through a rotating dimmer base. Aluminium structure and transparent glass diffuser.

FINISHINGS

Anodised Black
2700K cod.14001XOK27
3000K cod.14001XO00

Anodised Brass
2700K cod.14050XOK27
3000K cod.14050XO00



LIGHT EMISSION

Light source power: 12,9W
Power absorption: 18,5W
Light Emission: Diffuse
Light Direction: Indirect Downlight
Light Source: Discrete LED
CCT: 2700/3000K
CRI: 97
Lifetime: >55000h

Source Flux 2700K: 1136lm@380mA
Emitted Flux 2700K: 305lm
Efficacy 2700K: 17lm/W

Source Flux 3000K: 1216lm@380mA
Emitted Flux 3000K: 315lm
Efficacy 3000K: 18lm/W

ELECTRICAL FACTS

Stand-by absorption: <0.5W
Mains Voltage: 100/240VAC
Master output: 24VDC; max 0.83A
Ta max: 40°C

PACKAGING DATA

Box dimensions: 27x27x47cm
Volume: 0,04m³
Gross weight: 7,2Kg

