

Eve

Foster+Partners, 2019

LUMINA

Last release - 2026, May

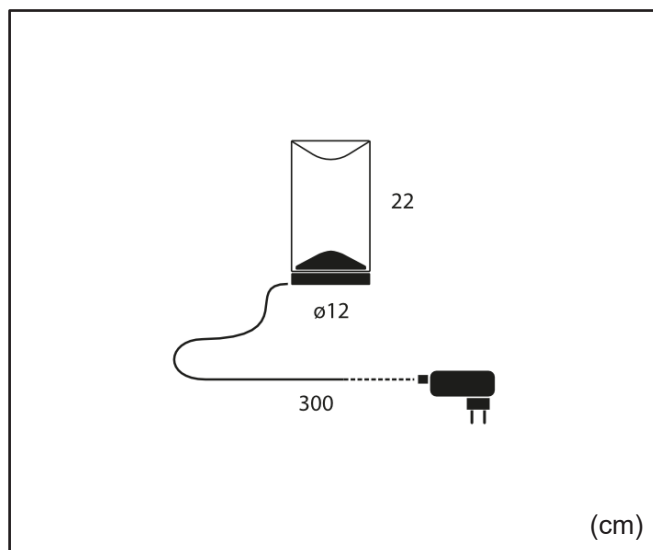


Table lamp for indirect and diffused lighting. The LED source is housed in the base. The light intensity is adjustable through a touch dimmer on the base. Aluminium structure and transparent glass diffuser.

FINISHINGS

Anodised Black
2700K cod.14101XOK27
3000K cod.14101XO00

Anodised Brass
2700K cod.14150XOK27
3000K cod.14150XO00



LIGHT EMISSION

Light source power: 4,2W
Power absorption: 6W
Light Emission: Diffuse
Light Direction: Indirect Downlight
Light Source: Discrete LED
CCT: 2700/3000K
CRI: >90
Lifetime: >55000h

Source Flux 2700K: 374lm@350mA
Emitted Flux 2700K: 70lm
Efficacy 2700K: 12lm/W

Source Flux 3000K: 391lm@350mA
Emitted Flux 3000K: 73lm
Efficacy 3000K: 12lm/W

ELECTRICAL FACTS

Stand-by absorption: <0.5W
Mains Voltage: 100/240VAC
Master output: 24VDC; max 0.63A
Ta max: 40°C

PACKAGING DATA

Box dimensions: 21x21x27cm
Volume: 0,012m³
Gross weight: 1,7Kg

