

Flo Grommet F20

Foster+Partners, 2012

LUMINA


Last release - 2026, May



Desk lamp in varnish coated aluminium and steel, for diffused directional light, to be fixed on a table surface. The head rotates 300° to direct the light and the structure swivels 300°. 2-step push switch positioned on the head.

FINISHINGS

 Black Soft Touch 2700K cod.96201STK27 3000K cod.96201ST00	 Matt Black 2700K cod.96201OPK27 3000K cod.96201OP00
 Matt White 2700K cod.96202OPK27 3000K cod.96202OP00	 Matt Red 2700K cod.96203OPK27 3000K cod.96203OP00
 Matt Yellow 2700K cod.96205OPK27 3000K cod.96205OP00	 Brushed Nickel 2700K cod.96244K27 3000K cod.96244000
 Metallic Bronze 2700K cod.96229MTK27 3000K cod.96229MT00	 Gunmetal 2700K cod.96232K27 3000K cod.96232000

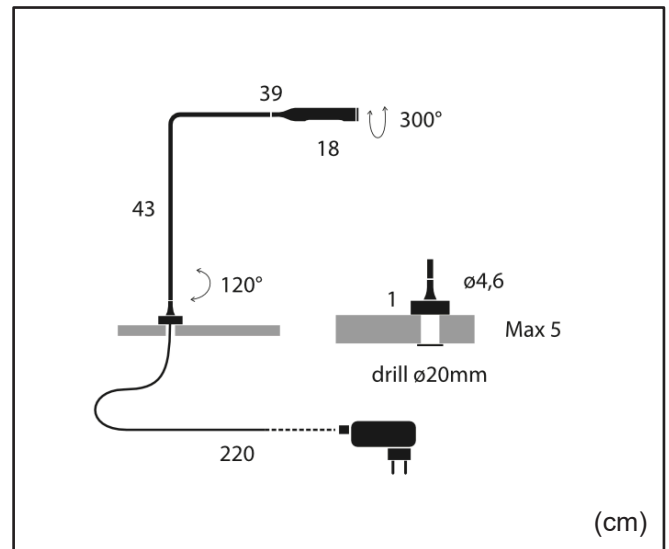

LIGHT EMISSION


Light source power:	6W	Source Flux 2700K:	380lm@550mA
Power absorption:	7,5W	Emitted Flux 2700K:	302lm
Light Emission:	Diffuse	Efficacy 2700K:	40 lm/W
Light Direction:	Directional	Source Flux 3000K:	395lm@550mA
Light Source:	Discrete LED	Emitted Flux 3000K:	314lm
CCT:	2700/3000K	Efficacy 3000K:	42lm/W
CRI:	>90		
Lifetime:	>55000h		

ELECTRICAL FACTS

Stand-by absorption:	<0.5W
Mains Voltage:	100/240VAC
Master output:	24VDC; max 0.83A
Ta max:	40°C

PACKAGING DATA

Box dimensions:	69x47x8cm
Volume:	0,0246m ³
Gross weight:	1,62Kg

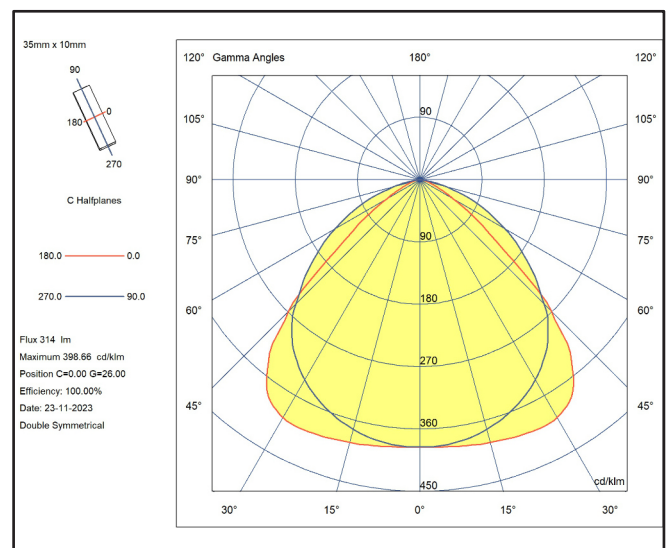

Flo Grommet F46

Foster+Partners, 2012

LUMINA


Last release - 2026, May



Desk lamp in varnish coated aluminium and steel, for diffused directional light, with embedded connection to be fixed on a table surface. The head rotates 300° to direct the light and the structure swivels 300°. 2-step push switch positioned on the head.

FINISHINGS

 Black Soft Touch 2700K cod.96K271STK27 3000K cod.96001ST00	 Matt Black 2700K cod.96001OPK27 3000K cod.96001OP00
 Matt White 2700K cod.96K272OPK27 3000K cod.96002OP00	 Matt Red 2700K cod.96K273OPK27 3000K cod.96003OP00
 Matt Yellow 2700K cod.96K275OPK27 3000K cod.96005OP00	 Brushed Nickel 2700K cod.96044K27 3000K cod.96044000
 Metallic Bronze 2700K cod.96029MTK27 3000K cod.96029MT00	 Gunmetal 2700K cod.96032K27 3000K cod.96032000

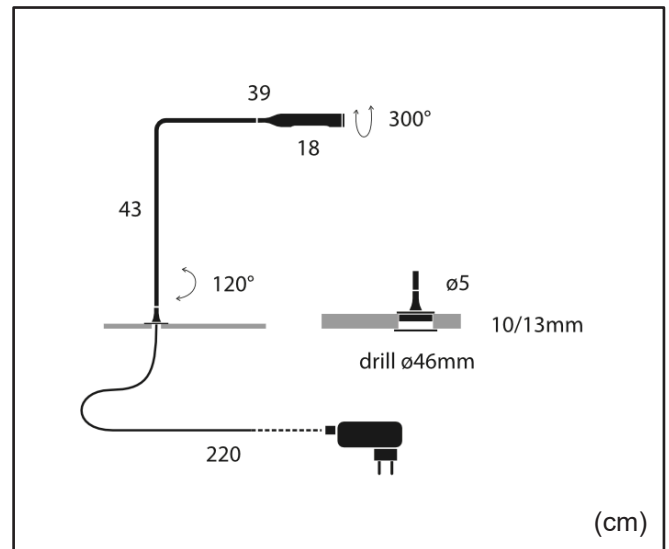

LIGHT EMISSION

Light source power:	6W	Source Flux 2700K:	380lm@550mA
Power absorption:	7,5W	Emitted Flux 2700K:	302lm
Light Emission:	Diffuse	Efficacy 2700K:	40 lm/W
Light Direction:	Directional	Source Flux 3000K:	395lm@550mA
Light Source:	Discrete LED	Emitted Flux 3000K:	314lm
CCT:	2700/3000K	Efficacy 3000K:	42lm/W
CRI:	>90		
Lifetime:	>55000h		

ELECTRICAL FACTS

Stand-by absorption:	<0.5W
Mains Voltage:	100/240VAC
Master output:	24VDC; max 0.83A
Ta max:	40°C

PACKAGING DATA

Box dimensions:	69x47x8cm
Volume:	0,0246m ³
Gross weight:	1,62Kg

