

Flo Wall

Foster+Partners, 2013

LUMINA

Last release - 2026, May



Wall lamp with cable and plug in varnish coated aluminium and steel, for diffused directional light. The head rotates 300° to direct the light, while the arm swivels 180° on the wall bracket. 2-step push switch positioned on the head. Cord and power supply included.

FINISHINGS

Black Soft Touch 2700K cod.97501STK27 3000K cod.97501ST00	Matt Black 2700K cod.97501OPK27 3000K cod.97501OP00
Matt White 2700K cod.97502OPK27 3000K cod.97502OP00	Matt Red 2700K cod.97503OPK27 3000K cod.97503OP00
Matt Yellow 2700K cod.97505OPK27 3000K cod.97505OP00	Brushed Nickel 2700K cod.97544K27 3000K cod.97544000
Metallic Bronze 2700K cod.97529MTK27 3000K cod.97529MT00	Gunmetal 2700K cod.97532K27 3000K cod.97532000

LIGHT EMISSION



Light source power:	3W	Source Flux 2700K:	250lm@350mA
Power absorption:	4,5W	Emitted Flux 2700K:	201lm
Light Emission:	Diffuse	Efficacy 2700K:	45lm/W
Light Direction:	Directional	Source Flux 3000K:	260lm@350mA
Light Source:	Discrete LED	Emitted Flux 3000K:	207lm
CCT:	2700/3000K	Efficacy 3000K:	46lm/W
CRI:	>90		
Lifetime:	>55000h		

ELECTRICAL FACTS

Stand-by absorption:	<0.5W
Mains Voltage:	100/240VAC
Master output:	24VDC; max 0.63A
Ta max:	40°C

PACKAGING DATA

Box dimensions:	50x31x8cm
Volume:	0,012m³
Gross weight:	1,15Kg

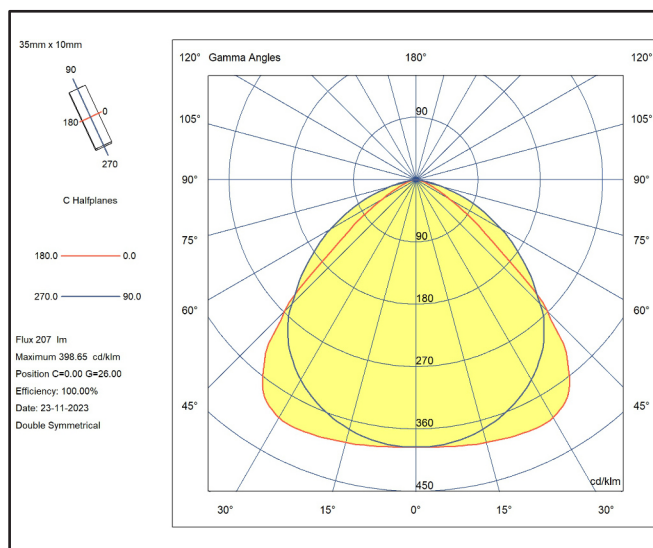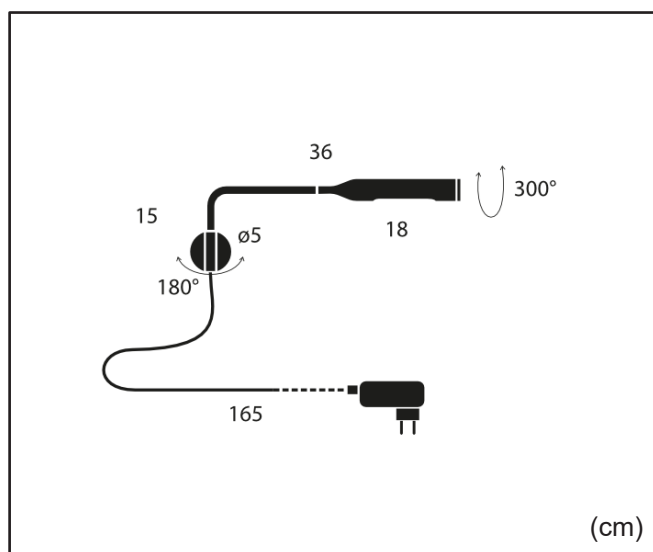

Flo Wall M

Foster+Partners, 2013



Last release - 2026, May



Wall lamp with in varnish coated aluminium and steel, for diffused directional light. The head rotates 300° to direct the light, while the arm swivels 180° on the wall bracket. 2-step push switch positioned on the head. Power supply not included and to be remotely installed.

The lamp requires a ballast properly set provided in Lumina ceiling roses, or purchased separately and installed remotely.

FINISHINGS

 Black Soft Touch 2700K cod.97601STK27 3000K cod.97601ST00	 Matt Black 2700K cod.97601OPK27 3000K cod.97601OP00
 Matt White 2700K cod.97602OPK27 3000K cod.97602OP00	 Matt Red 2700K cod.97603OPK27 3000K cod.97603OP00
 Matt Yellow 2700K cod.97605OPK27 3000K cod.97605OP00	 Brushed Nickel 2700K cod.97644K270 3000K cod.97644000
 Metallic Bronze 2700K cod.97629MTK27 3000K cod.97629MT00	 Gunmetal 2700K cod.97632K270 3000K cod.97632000

LIGHT EMISSION

Light source power:	3W	Source Flux 2700K:	250lm@350mA
Power absorption:	N/A	Emitted Flux 2700K:	201lm
Light Emission:	Diffuse	Efficacy 2700K:	62lm/W
Light Direction:	Directional	Source Flux 3000K:	260lm@350mA
Light Source:	Discrete LED	Emitted Flux 3000K:	207lm
CCT:	2700/3000K	Efficacy 3000K:	64lm/W
CRI:	>90		
Lifetime:	>55000h		

ELECTRICAL FACTS

Stand-by absorption:	N/A	Box dimensions:	50x31x8cm
Mains Voltage:	N/A	Volume:	0,012m ³
Master output:	24VDC; min 350mA	Gross weight:	1,1Kg
Ta max:	40°C		

PACKAGING DATA

