



Suspension lamp providing direct and diffused light. The glass diffuser consists of 6 sheets of 15 mm thick extra-clear float glass, glued together, milled, ground and polished to a perfect quality shape. The mount housing the customized integrated LED is machined from aluminum billet using a CNC machine. Ceiling rose included.


FINISHINGS

Brushed Nickel (0-10V/push/dali)
2700K cod. GALD44K27
3000K cod. GALD44K30

Brushed Gold (0-10V/push/dali)
2700K cod. GALD45K27
3000K cod. GALD45K30

Brushed Nickel (Triac)
2700K cod. GALT44K27220
3000K cod. GALT44K30220

Brushed Gold (Triac)
2700K cod. GALT45K27220
3000K cod. GALT45K30220

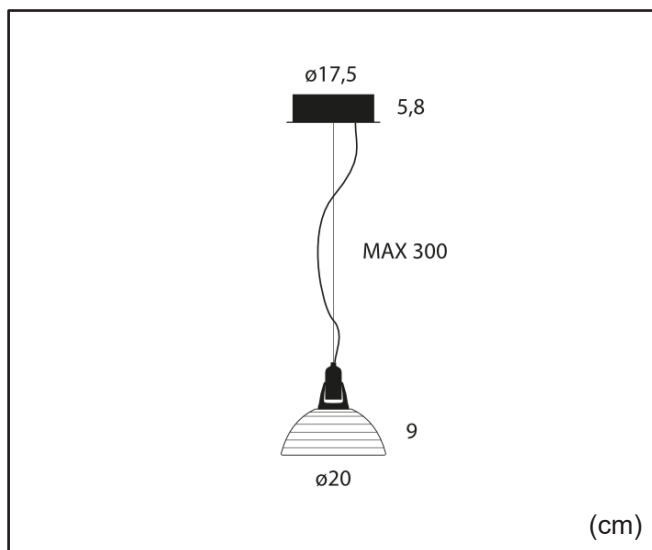

LIGHT EMISSION

Light source power: 12W
Power absorption: 14W
Light Emission: Diffuse
Light Direction: Downlight
Light Source: Discrete LED
CCT: 2700/3000K
CRI: 97
Lifetime: >55000h

Source Flux 2700K: 1360lm@350mA
Emitted Flux 2700K: 641lm
Efficacy 2700K: 42lm/W


Source Flux 3000K: 1400lm@350mA
Emitted Flux 3000K: 692lm
Efficacy 3000K: 46lm/W

ELECTRICAL FACTS

Stand-by absorption: <0.6W
Mains Voltage: 100/240VAC
Master output: max 60VDC; 350mA
Ta max: 40°C

PACKAGING DATA

Box dimensions: 29,5x28,7x26,8cm
Volume: 0,023m³
Gross weight: 5Kg

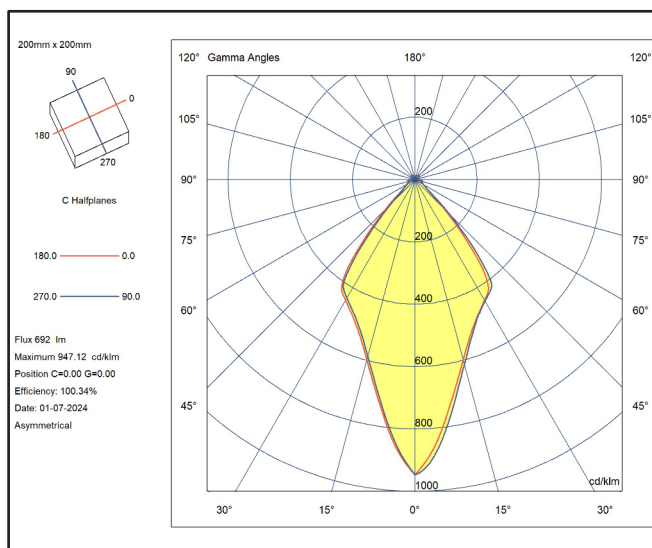

Galileo Modular

Emanuele Ricci, 2023

LUMINA

Last release - 2026, May




Modular suspension lamp providing direct and diffused light. The glass diffuser consists of 6 sheets of 15 mm thick extra-clear float glass, glued together, milled, ground and polished to a perfect quality shape. The mount housing the customized integrated LED is machined from aluminum billet using a CNC machine.

The lamp requires a ballast properly set provided in Lumina ceiling roses, or purchased separately and installed remotely.

FINISHINGS

Brushed Nickel
2700K cod.GALM144K27
3000K cod.GALM144K30

Brushed Gold
2700K cod.GALM145K27
3000K cod.GALM145K30

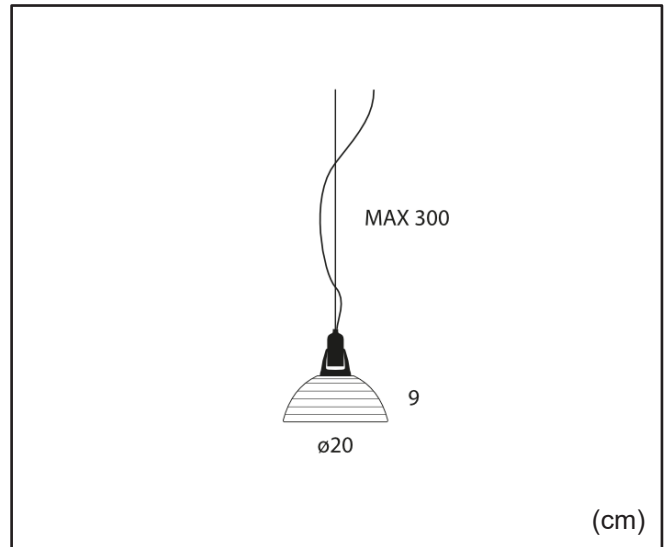

LIGHT EMISSION

Light source power:	12W	Source Flux 2700K:	1360lm@350mA
Power absorption:	N/A	Emitted Flux 2700K:	641lm
Light Emission:	Diffuse	Efficacy 2700K:	42lm/W
Light Direction:	Downlight	Source Flux 3000K:	1400lm@350mA
Light Source:	Discrete LED	Emitted Flux 3000K:	692lm
CCT:	2700/3000K	Efficacy 3000K:	46lm/W
CRI:	97		
Lifetime:	>55000h		

ELECTRICAL FACTS

Stand-by absorption:	<0.6W	Box dimensions:	29,5x28,7x26,8cm
Mains Voltage:	N/A	Volume:	0,023m ³
Master output:	350mA	Gross weight:	4,2Kg
Ta max:	40°C		

PACKAGING DATA

