

Tia 400

Foster+Partners, 2022

LUMINA


Last release - 2026, May



Suspension lamp with aluminium reflector. The lathed aluminium body at the heart of the product houses the integrated LED light engine with custom developed lens. Ceiling rose included. Compatible with Push, 1-10V, or DALI dimming.

FINISHINGS

Matt Black 2700K cod.181D01OPK27 3000K cod.181D01OP00	Ultra Matt White 2700K cod.181D01OPK27 3000K cod.181D01OP00
Oxygen Red 2700K cod.181D35STK27 3000K cod.181D35ST00	Battersea Green 2700K cod.181D28BGK27 3000K cod.181D28BG00
Sapphire Blue 2700K cod.181D06ZAK27 3000K cod.181D06ZA00	Brushed Aluminum 2700K cod.181D34OPK27 3000K cod.181D34OP00
Metallic Bronze 2700K cod.181D29MTK27 3000K cod.181D29MT00	

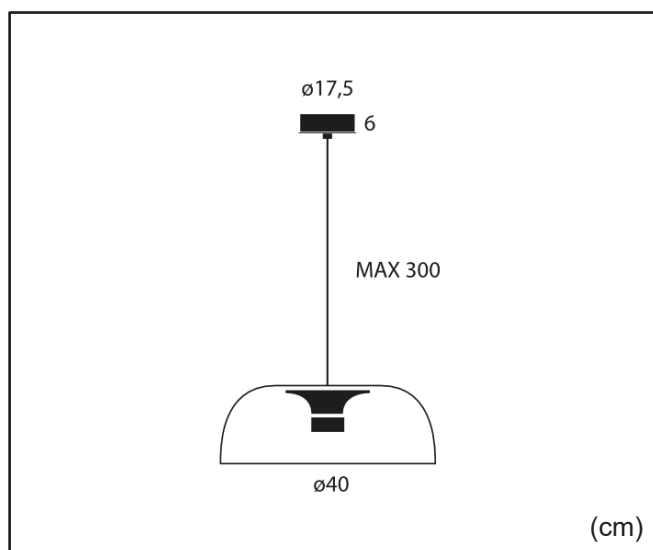


LIGHT EMISSION

Light source power:	18W	Source Flux 2700K:	1904lm@500mA
Power absorption:	21W	Emitted Flux 2700K:	839lm
Light Emission:	Diffuse	Efficacy 2700K:	40lm/W
Light Direction:	Downlight	Source Flux 3000K:	1981lm@500mA
Light Source:	Discrete LED	Emitted Flux 3000K:	873lm
CCT:	2700/3000K	Efficacy 3000K:	42lm/W
CRI:	97		
Lifetime:	>55000h		

ELECTRICAL FACTS

Stand-by absorption:	<0.5W	Box dimensions:	46x46x27cm
Mains Voltage:	100/240VAC	Volume:	0,057m ³
Master output:	500mA	Gross weight:	3,2Kg
Ta max:	40°C		

PACKAGING DATA

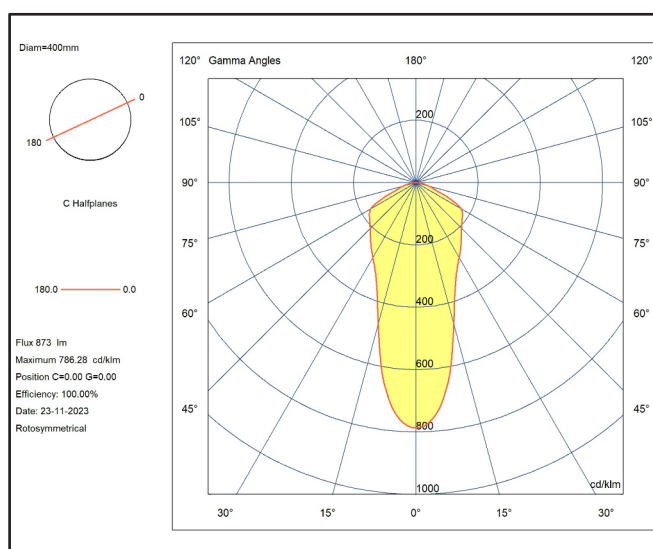

Tia 400 TF

Foster+Partners, 2022

LUMINA

Last release - 2026, May



Suspension lamp with aluminium reflector. The lathed aluminium body at the heart of the product houses the integrated LED light engine with custom developed lens. Ceiling rose included. Compatible with Triac dimming.

FINISHINGS

Matt Black 2700K cod.181TF01OPK27220 3000K cod.181TF01OP220	Ultra Matt White 2700K cod.181TF02UMK27220 3000K cod.181TF02UM220
Oxygen Red 2700K cod.181TF35STK27220 3000K cod.181TF35ST220	Battersea Green 2700K cod.181TF28BGK27220 3000K cod.181TF28BG220
Sapphire Blue 2700K cod.181TF06ZAK27220 3000K cod.181TF06ZA220	Brushed Aluminum 2700K cod.181TF34OPK27220 3000K cod.181TF34OP220
Metallic Bronze 2700K cod.181TF29MTK27220 3000K cod.181TF29MT220	

LIGHT EMISSION

Light source power:	18W	Source Flux 2700K:	1904lm@500mA
Power absorption:	21W	Emitted Flux 2700K:	839lm
Light Emission:	Diffuse	Efficacy 2700K:	40lm/W
Light Direction:	Downlight	Source Flux 3000K:	1981lm@500mA
Light Source:	Discrete LED	Emitted Flux 3000K:	873lm
CCT:	2700/3000K	Efficacy 3000K:	42lm/W
CRI:	97		
Lifetime:	>55000h		

ELECTRICAL FACTS

Stand-by absorption:	<0.5W
Mains Voltage:	220/240VAC
Master output:	500mA
Ta max:	40°C

PACKAGING DATA

Box dimensions:	46x46x27cm
Volume:	0,057m ³
Gross weight:	3,2Kg

