

# Tia 600

Foster+Partners, 2022

LUMINA

Last release - 2026, May



Suspension lamp with aluminium reflector. The lathed aluminium body at the heart of the product houses the integrated LED light engine with custom developed lens. Ceiling rose included. Compatible with Push, 1-10V, or DALI dimming.

## FINISHINGS

|                                                                         |                                                                          |
|-------------------------------------------------------------------------|--------------------------------------------------------------------------|
| <b>Matt Black</b><br>2700K cod.182D01OPK27<br>3000K cod.182D01OP00      | <b>Ultra Matt White</b><br>2700K cod.182D01OPK27<br>3000K cod.182D01OP00 |
| <b>Oxygen Red</b><br>2700K cod.182D35STK27<br>3000K cod.182D35ST00      | <b>Battersea Green</b><br>2700K cod.182D28BGK27<br>3000K cod.182D28BG00  |
| <b>Sapphire Blue</b><br>2700K cod.182D06ZAK27<br>3000K cod.182D06ZA00   | <b>Brushed Aluminum</b><br>2700K cod.182D34OPK27<br>3000K cod.182D34OP00 |
| <b>Metallic Bronze</b><br>2700K cod.182D29MTK27<br>3000K cod.182D29MT00 |                                                                          |

## LIGHT EMISSION



|                     |              |                     |              |
|---------------------|--------------|---------------------|--------------|
| Light source power: | 25W          | Source Flux 2700K:  | 2666lm@700mA |
| Power absorption:   | 27W          | Emitted Flux 2700K: | 1169lm       |
| Light Emission:     | Diffuse      | Efficacy 2700K:     | 43lm/W       |
| Light Direction:    | Downlight    | Source Flux 3000K:  | 2774lm@700mA |
| Light Source:       | Discrete LED | Emitted Flux 3000K: | 1216lm       |
| CCT:                | 2700/3000K   | Efficacy 3000K:     | 45lm/W       |
| CRI:                | 97           |                     |              |
| Lifetime:           | >55000h      |                     |              |

## ELECTRICAL FACTS

|                      |            |
|----------------------|------------|
| Stand-by absorption: | <0.5W      |
| Mains Voltage:       | 100/240VAC |
| Master output:       | 700mA      |
| Ta max:              | 40°C       |

## PACKAGING DATA

|                 |                    |
|-----------------|--------------------|
| Box dimensions: | 67x67x34cm         |
| Volume:         | 0,15m <sup>3</sup> |
| Gross weight:   | 6,5Kg              |

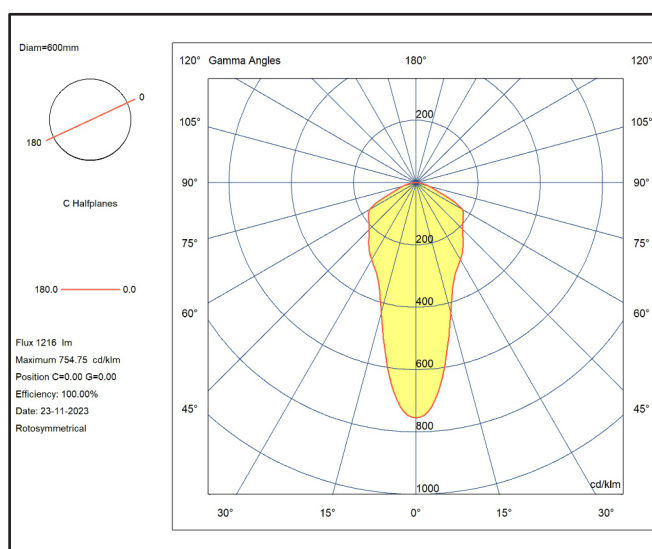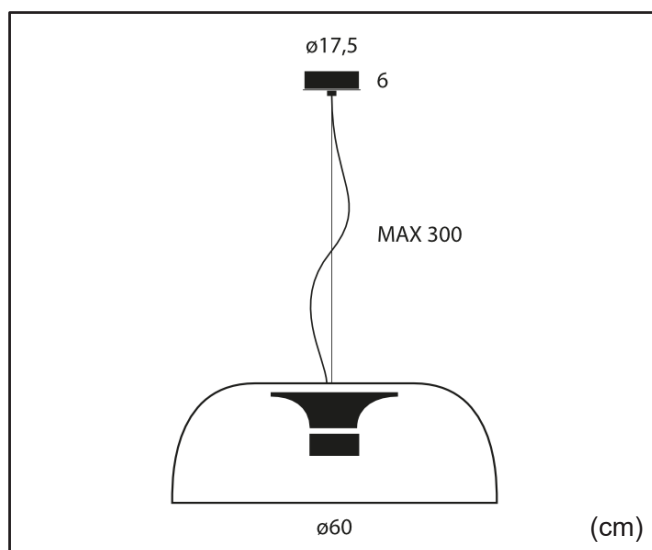

# Tia 600 TF

Foster+Partners, 2022

LUMINA

Last release - 2026, May



Suspension lamp with aluminium reflector. The lathed aluminium body at the heart of the product houses the integrated LED light engine with custom developed lens. Ceiling rose included. Compatible with Triac dimming.

## FINISHINGS

|                                                                               |                                                                                |
|-------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
| <b>Matt Black</b><br>2700K cod.182TF01OPK27220<br>3000K cod.182TF01OP220      | <b>Ultra Matt White</b><br>2700K cod.182TF02UMK27220<br>3000K cod.182TF02UM220 |
| <b>Oxygen Red</b><br>2700K cod.182TF35STK27220<br>3000K cod.182TF35ST220      | <b>Battersea Green</b><br>2700K cod.182TF28BGK27220<br>3000K cod.182TF28BG220  |
| <b>Sapphire Blue</b><br>2700K cod.182TF06ZAK27220<br>3000K cod.182TF06ZA220   | <b>Brushed Aluminum</b><br>2700K cod.182TF34OPK27220<br>3000K cod.182TF34OP220 |
| <b>Metallic Bronze</b><br>2700K cod.182TF29MTK27220<br>3000K cod.182TF29MT220 |                                                                                |

## LIGHT EMISSION

|                     |              |                     |              |
|---------------------|--------------|---------------------|--------------|
| Light source power: | 25W          | Source Flux 2700K:  | 2666lm@700mA |
| Power absorption:   | 27W          | Emitted Flux 2700K: | 1169lm       |
| Light Emission:     | Diffuse      | Efficacy 2700K:     | 43lm/W       |
| Light Direction:    | Downlight    | Source Flux 3000K:  | 2774lm@700mA |
| Light Source:       | Discrete LED | Emitted Flux 3000K: | 1216lm       |
| CCT:                | 2700/3000K   | Efficacy 3000K:     | 45lm/W       |
| CRI:                | 97           |                     |              |
| Lifetime:           | >55000h      |                     |              |

## ELECTRICAL FACTS

|                      |            |                 |                    |
|----------------------|------------|-----------------|--------------------|
| Stand-by absorption: | <0.5W      | Box dimensions: | 67x67x34cm         |
| Mains Voltage:       | 220/240VAC | Volume:         | 0,15m <sup>3</sup> |
| Master output:       | 700mA      | Gross weight:   | 6,5Kg              |
| Ta max:              | 40°C       |                 |                    |

## PACKAGING DATA

